

U.S. Pipe Series USP1 Resilient Wedge Gate Valve

14" – 48" • Ductile Iron • 250 PSIG Working Pressure

Forged Bronze Stem and Thrust Collar

Superior strength, with dual thrust washers and triple O-ring seals.

Epoxy Coating

Superior fusion-bonded powder epoxy inside and out, 10 mils nominal.

Polymer Wedge Bearings

Bearings caps on wedge guides and pads at four points on lower area of wedge avoid wedge tilt, lower operating torque, and resist wear on valve interior and wedge surfaces.

Triple Listed

Complies with ANSI/AWWA C515, 250 psig max. working pressure.
• UL and FM Approved (See Product Catalog for sizes & pressure ratings).

American Made Quality


Made in Chattanooga, Tennessee plant certified to ISO 9001. NSF 61 certified.

100% Elastomer Encapsulated Wedge

No thin spots, voids or uncoated areas for superior corrosion resistance.

Integral Legs

Valve stands upright for storage or during installation.

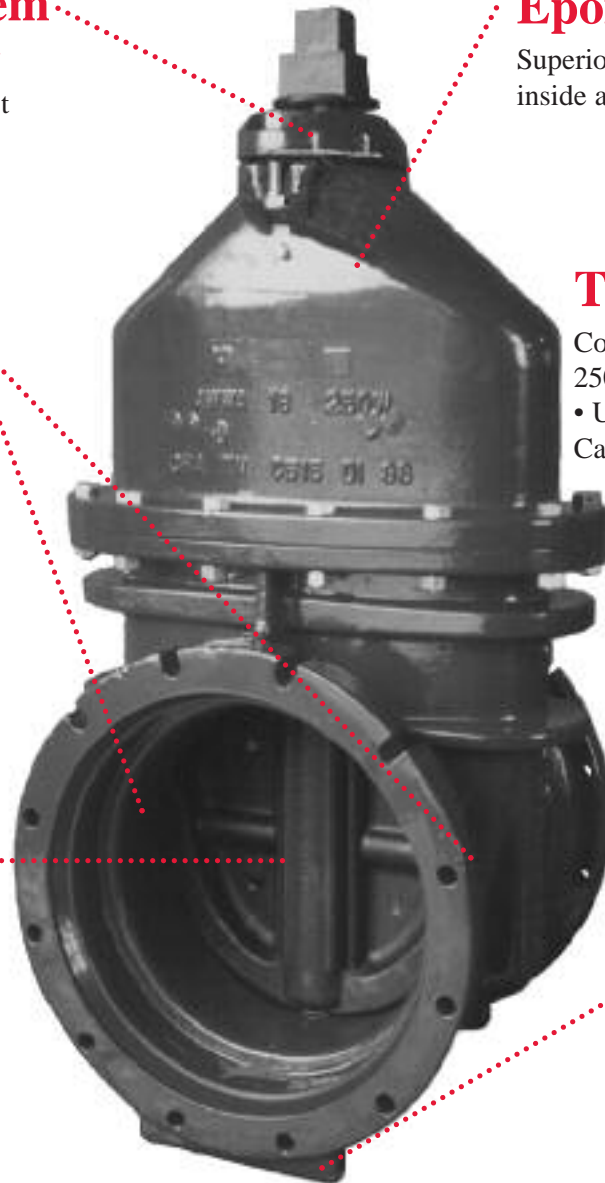

Valve and Hydrant Division
Customer Support Center: 800-871-2194
Decatur, IL

All products must be installed and maintained in accordance with applicable instructions and/or standards.
Reproduced with permission of copyright owner -- © Mueller 2000