


# 2-1/2"-12 SWING TYPE GRAVITY OPERATED CHECK VALVE DIMENSIONS - FL. X FL.

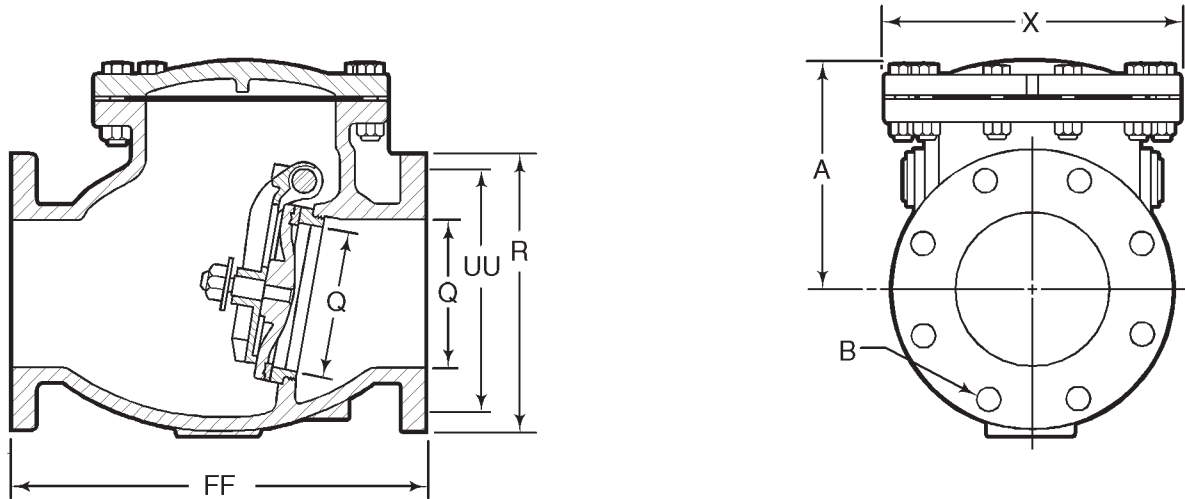

Dimension	Size*					
	2-1/2"	3"	4"	4" x 6"	4" x 8"	6"
Q (bore)	2.50	3.00	4.00	4.00 x 6.00	4.00 x 8.00	6.00
R	7.00	7.50	9.00	9.00 x 11.00	9.00 x 13.50	11.00
FF	10.00	11.00	12.88	12.88	12.88	16.00
A	5.75	6.25	7.25	7.25	8.00	9.00
X	6.94	7.56	9.00	9.00	9.00	11.69
B (number and size of bolts)	4--.75	4--.75	8--.75	8--.75, 8--.88	8--.75, 8--.88	8--.88
UU (bolt circle diameter)	5.50	6.00	7.50	7.50 x 9.50	7.50 x 11.75	9.50
Weight**	49	62	100	130	160	185

Dimension	Size*				
	6" x 8"	6" x 10"	8"	10"	12"
Q (bore)	6.00 x 8.00	6.00 x 10.00	8.00	10.00	12.00
R	11.00 x 13.50	11.00 x 16.00	13.50	16.00	19.00
FF	16.50	16.50	19.50	22.00	24.13
A	9.00	9.50	10.50	12.75	14.75
X	11.69	11.69	14.00	17.00	19.13
B (number and size of bolts)	8--.88, 8--.88	8--.88, 12--1.00	8--.88	12--1.00	12--1.00
UU (bolt circle diameter)	9.50 x 11.75	9.50 x 14.25	11.75	14.25	17.00
Weight**	207	230	286	463	653

\*Nominal

\*\*All dimensions are in inches. All weights are in pounds and are approximate