


### FIRE PROTECTION PRODUCTS

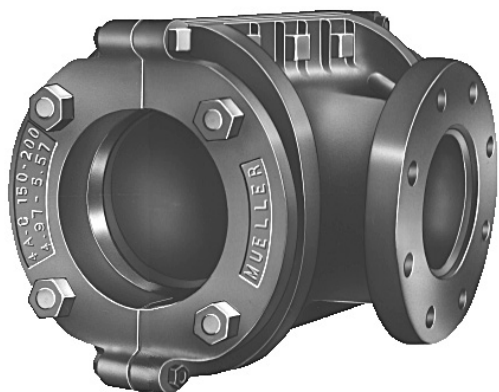

**H-619**

All Tapping Sleeves and Crosses meet AWWA Standards. There are no UL Listing Standards for Tapping Sleeves or Crosses.

**H-619:** Mechanical Joint Tapping Sleeve with Duck Tipped End Gaskets.

**H-719:** Mechanical Joint Tapping Cross with Duck Tipped End Gaskets.

- Maximum Working Pressure: 250 psi.
- Suitable for use with Asbestos-Cement Pipe in the following O.D. Range.

Sizes\*: 4"x4", 6"x4", 6"x6", 8"x4", 8"x6", 8"x8", 10"x4", 10"x6", 10"x8", 10"x10", 12"x4", 12"x6", 12"x8", 12"x10", 12"x12"

Nominal size of main	O.D. Range	
	Inch	mm
4"	5.01 - 5.39	127.25 - 136.90
6"	7.11 - 7.38	180.59 - 187.45
8"	9.30 - 9.58	236.22 - 243.33
10"	11.77 - 12.25	298.95 - 311.15
12"	14.03 - 14.51	356.36 - 368.55

**IMPORTANT**—Actual diameter of AC Pipe varies between manufacturers and from piece to piece, therefore, it is important to measure the pipe diameter to insure proper fit of these sleeves—especially in the 4", 6", and 8" sizes. Out-of-round AC Pipe can often be reduced somewhat by rasping in the area of the end gaskets and gland. All such work should be done in compliance with Pipe Manufacturers' Recommendations.

\*First number is size of Main, second is size of the side outlet of Sleeve or Cross.

**T-28:** Dual Compression Seal Tapping Sleeve



**T-28**

- Fits all classes of pipe through Class D pit cast gray iron.
- Test plug standard.
- Epoxy coated ductile iron construction.
- O-ring sealed outlet and flange connection.
- Outlet flange with dimensions and drilling that comply with ANSI B16.1, Class 125 with MSS SP-60.
- Stainless steel bolts.
- Maximum working pressure: 250 psig (1724 kPa),

Sizes\*: 6"x3", 6"x4", 6"x6", 8"x3", 8"x4", 8"x6", 8"x8", 10"x3", 10"x4", 10"x6", 10"x8", 10"x10", 12"x3", 12"x4", 12"x6", 12"x8", 12"x10", 12"x12", 16"x3", 16"x4", 16"x6", 16"x8", 16"x8", 16"x10", 16"x12"

#### Tapping Sleeve pipe information

Nominal size of main	O.D. Range		Class and type of pipe
	Inch	mm	
6"	6.90 - 7.10	175.26 - 180.34	Fits all classes of pipe through Class D pit cast gray iron.
8"	9.05 - 9.30	229.87 - 236.22	
10"	11.10 - 11.40	281.94 - 289.56	
12"	13.20 - 13.50	335.28 - 342.90	
16"	17.40 - 17.80	441.96 - 452.12	