

RESILIENT WEDGE CUT-IN VALVES WITH D-150 M.J. ENDS



UL / FM

FIRE PROTECTION PRODUCTS

- C-2360-44 D-150** mechanical joint ends with accessories and duck tipped rubber gaskets
- C-2360-45 D-150** mechanical joint ends with accessories and plain tipped rubber gaskets
- C-2360-54 D-150** mechanical joint ends with accessories and duck tipped rubber gaskets and bonding set screws in gland
- C-2360-55 D-150** mechanical joint ends with accessories and plain tipped rubber gaskets and bonding set screws in gland

- Sizes-- 4", 6", 8"
- Meets or exceeds all applicable requirements of ANSI/AWWA C509 Standard and is certified to ANSI/NSF 61
- Iron body with nominal 10 mils MUELLER® Pro-Gard™ Fusion Epoxy Coated interior and exterior surfaces
- Epoxy coating meets or exceeds all applicable requirements of ANSI/AWWA C550 Standard and is certified to ANSI/NSF 61
- Iron wedge, symmetrical & fully encapsulated with molded rubber; no exposed iron
- Non-rising stem (NRS)
- Triple O-ring seal stuffing box (2 upper & 1 lower O-ring)
- 2" square wrench nut (optional handwheel available)--open left or open right
- 4" - 8" sizes--250 psig (1723 kPa) maximum working pressure, 500 psig (3447 kPa) static test pressure

Options


- Position indicators
- ASTM B98-C66100/H02 stem
- Stainless steel fasteners: Type 316
- Handwheel



Rubber
Cross section of duck tipped rubber gasket.



Rubber
Cross section of plain tipped rubber gasket.

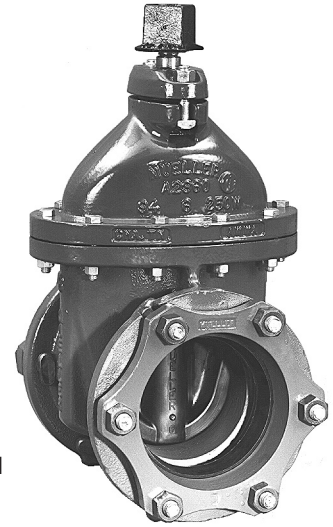

C-2360-44
D-150 M.J. accessories
shipped unassembled

Resilient Wedge Cut-In Valve Parts

Catalog Part No.	Description	Material	Material standard
G-16	Bonnet Bolts & Nuts	Stainless Steel	Type 304
G-41	Stuffing Box Bolts & Nuts	Stainless Steel	Type 304
G-49	Stem O -rings (3)	Rubber	ASTM D2000
G-200	Wrench Nut Cap Screw	Stainless Steel	Type 304
G-201	Stuffing Box Seal	Rubber	ASTM D2000
G-202	Wrench Nut	Cast Iron	ASTM A126 CL.B
G-203	Stem	Bronze	ASTM B138
G-204	Hand Wheel (not shown)	Cast Iron	ASTM A126 CL.B
G-205	Stem Nut	Bronze	ASTM B62
G-206	Guide Cap Bearings	Celcon	
G-207	Stuffing Box	Cast iron	ASTM A126 CL.B
G-208	Anti-friction Washers (2)	Celcon	
G-209	Wedge, Rubber Encapsulated	Cast Iron**	ASTM A126 CL.B
G-210***	Bonnet	Cast Iron	ASTM A126 CL.B
G-211***	Bonnet Gasket	Rubber	ASTM D2000
G-212***	Body	Cast Iron	ASTM A126 CL.B

**Fully encapsulated in molded rubber with no iron exposed

***Previous to 1999 these parts on 4"-8" valves were designed with a gasket instead of an O-ring and with additional bolts. Confirm the type of seal when ordering a replacement gasket or O-ring.

