

MUELLER® BRAND PIPE REPAIR CLAMP ACCESSORIES




Tapered screw plugs



Tapered screw plugs are used to stop leaks in steel pipe lines, boilers, tanks and large diameter pipe lines. They are self threading. Install tapered screw plugs by screwing into hole and welding in place. Plugs are made of heat treated steel alloy.

Part number	Size
514258	3/8" Hex. x 1-1/4"
514259	5/8" Hex. x 2-1/8"
514260	13/16" Hex. x 2-3/4"
514261	1" Hex. x 3-3/16"

Gasket material for pipe repair clamps




Smooth Nitrile gasket material

Minimum order 1yd ² (0.84m ²)						
Part number	Thickness		Size		Approximate weight	
	inch	(mm)	inch	(mm)	lb	(kg)
518841	3/32	(2.4)	36 x 36	(914 x 914)	3	(1.4)



Smooth reinforced Nitrile gasket material

Minimum order 1yd ² (0.84 m ²)						
Part number	Thickness		Size		Approximate weight	
	inch	(mm)	inch	(mm)	lb	(kg)
519149	9/64	(3.6)	36 x 36	(914 x 914)	10	(4.5)

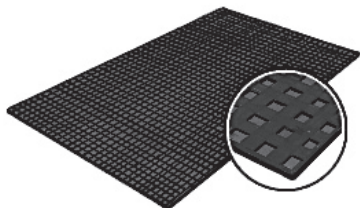

Gridded Nitrile gasket material

Part number	Dimensions		Minimum order
	inch	(mm)	
307264	Slab 24 x 60	(610 x 1524)	1 slab - approximately 13 lb (5.9 kg)