




MUELLER® BRAND DR2A SERIES DUCTILE IRON SERVICE SADDLES - DOUBLE STRAP

Rev. 1-06

Nylon Ductile Iron Service Saddles for use on cast iron, ductile iron, steel and A-C pipe

- Outlet tapped with AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- Double strap design rated at 500 psig (3447 kPa) maximum working pressure
- ASTM A395 ductile iron body
- Body is Nylon 11 (10 -12 mil)
- Flattened steel strap
- Rolled strap threads
- Nitrile O-ring gasket
- 1/2" thru 2" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 certified

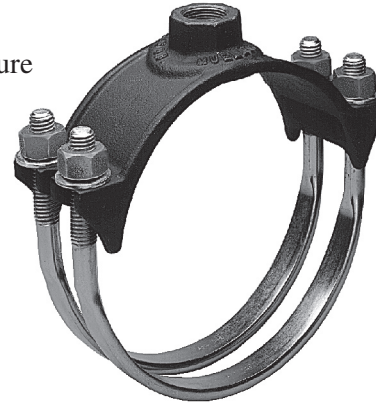

DR2A Series

Ductile Iron Service Saddles with Steel Alloy Straps

Pipe O.D. range		Kind and size of pipe		Double steel alloy straps with AWWA I.P. thread (F.I.P.T.)							Double steel alloy straps with AWWA taper thread (C.C.)							
Inch	mm	A-C	Std. Steel IPS PVC	Cast iron, ductile iron, PVC C900	Base Catalog Number	Size of tapping (add to "Base" to complete catalog number)						Base Catalog Number	Size of tapping (add to "Base" to complete catalog number)					
						1/2"	3/4"	1"	1-1/4"	1-1/2"	2"		1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
						2.35 - 2.50	59.7 - 63.5		2"	2"*	DR 2 A0235 IP		050	075	100	-	-	-
3.56 - 4.00	91.0 - 101.0		3-1/2"	3"	DR 2 A 0356 IP	050	075	100	-	-	-	DR 2 A0356 CC	050	075	100	-	-	-
4.47 - 5.32	113.5 - 135.1		4"	4"	DR 2 A0447 IP	050	075	100	125	150	200	DR 2 A0447 CC	050	075	100	125	150	200
6.59 - 7.37	167.4 - 187.2	**	6"	6"	DR 2 A0659 IP	050	075	100	125	150	200	DR 2 A0659 CC	050	075	100	125	150	200
8.54 - 9.79	216.9 - 248.7		8"	8"	DR 2 A0854 IP	050	075	100	125	150	200	DR 2 A0854 CC	050	075	100	125	150	200
10.64 - 12.12	270.3 - 307.8		10"	10"	DR 2 A1064 IP	050	075	100	125	150	200	DR 2 A1064 CC	050	075	100	125	150	200
12.62 - 14.38	320.5 - 365.3		12"	12"	DR 2 A1262 IP	050	075	100	125	150	200	DR 2 A1262 CC	050	075	100	125	150	200
17.40 - 18.80	442.0 - 477.5		-	16"	DR 2 A1740 IP	-	075	100	125	150	200	DR 2 A1740 CC	-	075	100	125	150	200

* Important—carefully check the range of the saddle with the O.D. of the pipe being used.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer. To make certain you select the proper clamp:

1) Determine the O.D. of the pipe at the point of saddle installation;

2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

NOTE: Ductile Iron Double Stainless Strap Saddles can be fitted for IPS PVC or C900.

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.