


No.	DESCRIPTION	MATERIAL
1	STEM	CAST LOW LEAD BRASS ALLOY
2	O-RING	EPDM ASTM D2000
3	BALL	CAST LOW LEAD BRASS ALLOY
4	GASKET - SEAL	NITRILE ASTM D2000
5	BODY	CAST LOW LEAD BRASS ALLOY
6	CAP	CAST BRASS ASTM B62 ALLOY C83600
7	ROLLPIN	STAINLESS STEEL ASTM A240 TYPE 302
8	O-RING	EPDM ASTM D2000
9	SEALING PLUG	CAST LOW LEAD BRASS ALLOY
10	CTS GSKT SUB	SBR ASTM D2000 - GSKT 410ss - BAND
11	CONN. NUT	CAST BRASS ASTM B62 ALLOY C83600

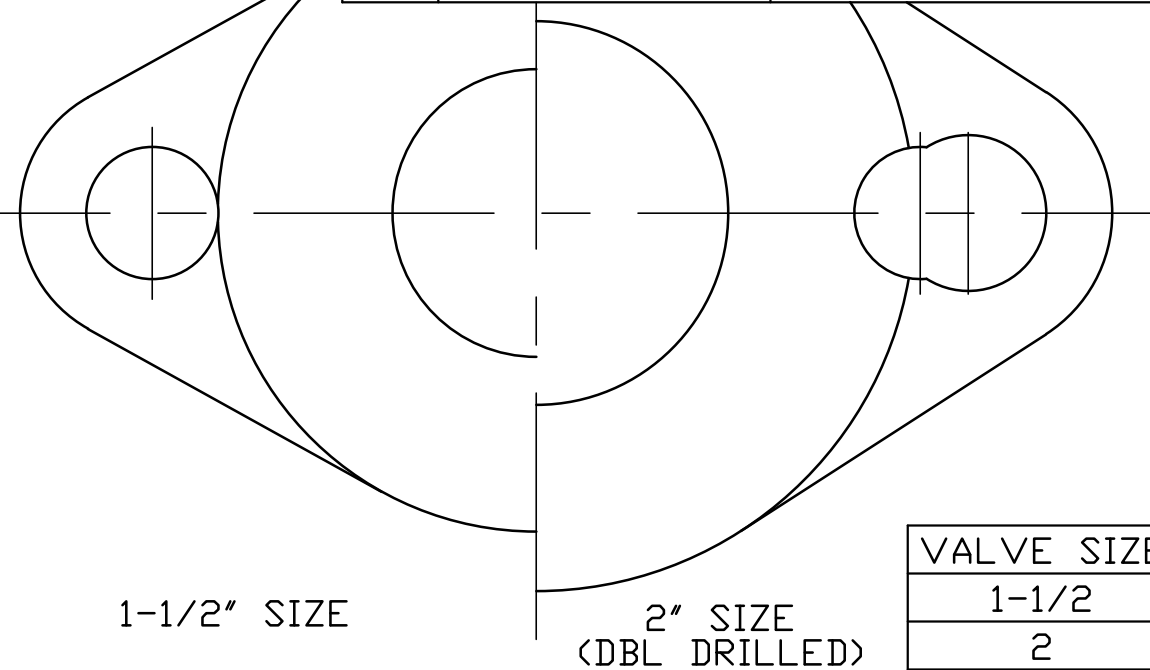

VALVE SIZE	A	B
1-1/2	1-13/16"	3"
2	2-3/16"	3-25/32"

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\JJ\SUBMITTALS\E1975WSG

DRFTR	RWB	2/5/10	<b>JONES</b>		
CHKR					
ENGR					
MGR					
UNLESS OTHERWISE NOTED			THIRD ANGLE PROJECTION		
SURFACE PREPARATION:			REF. No. SCALE		
BREAK CORNER(S) ---- .000					
SURFACE FINISH -- XX RMS					
TOLERANCE(S):					
LINEAR ----- ± .000					
ANGULAR ----- ± 0°00'					
BY DATE					
STK No:					
MAT'L:					
DESCR.					
BALL ANGLE METER VALVE			DWG NUMBER		
(110 CTS x MTR FLANGE)			E1975WSG		
REV	ECR	DESCRIPTION	DATE	BY	CHKR

DWG NUMBER  
E1975WSG  
JJ-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED