


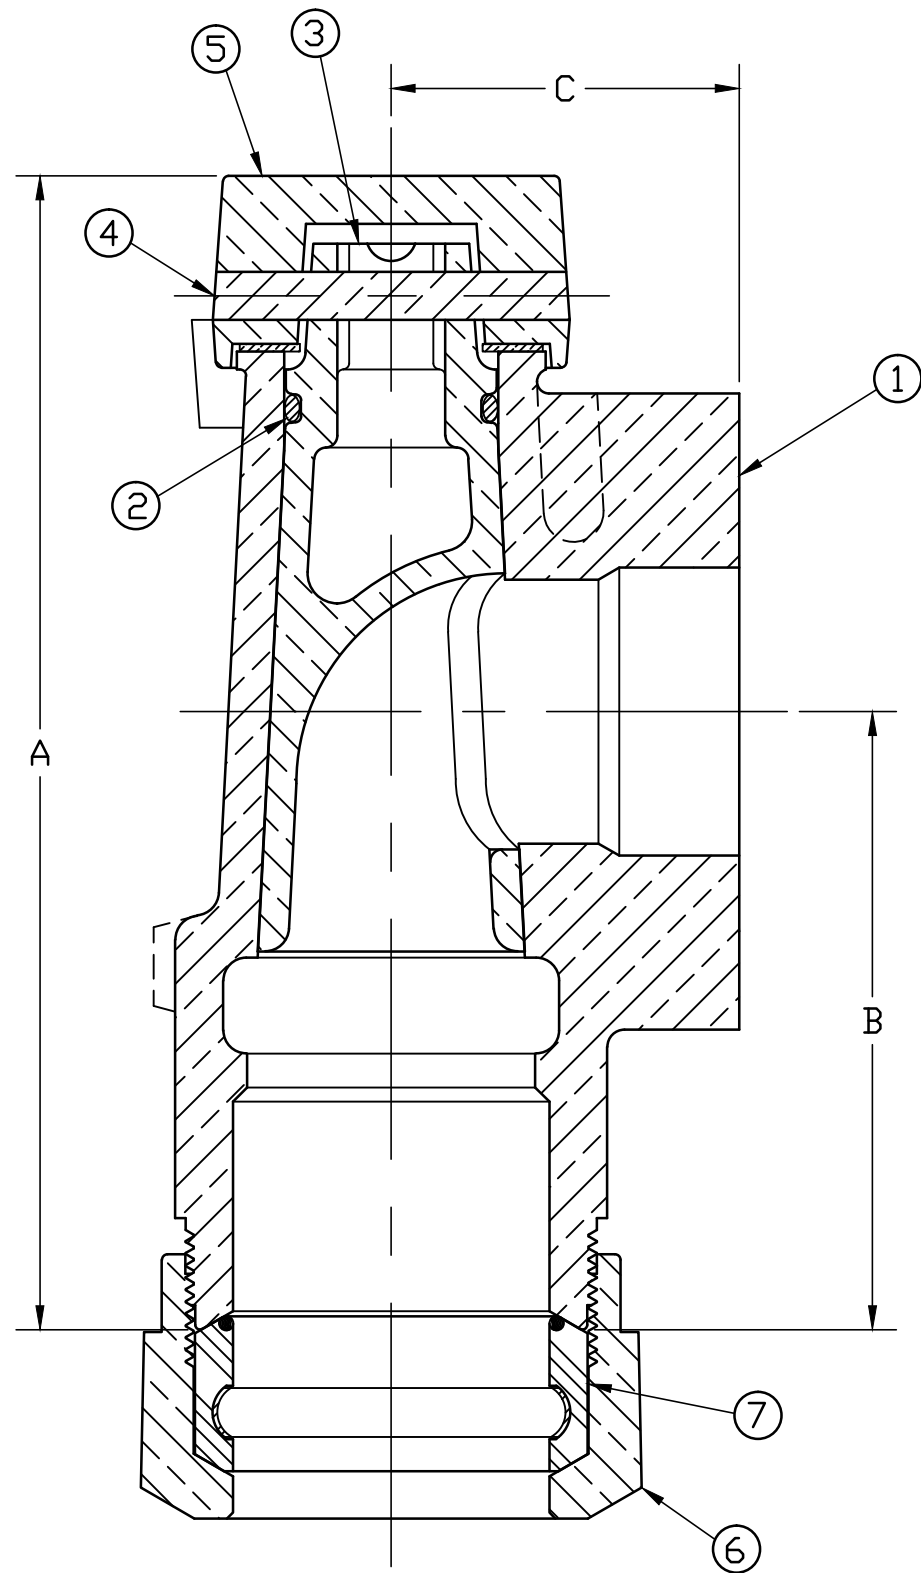


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	O-RING	EP ASTM D2000
3	KEY	CAST LOW LEAD BRASS ALLOY
4	GROOVE PIN	ASTM B124 ALLOY 655 SILICON BRONZE
5	CAP	CAST BRASS ASTM B62 ALLOY C83600
6	CONNX NUT	CAST BRASS ASTM B62 ALLOY C83600
7	CTS GASKET SUB	SBR ASTM D2000 & 410 STAINLESS STEEL

VALVE SIZE	A	B	C
1-1/2"	6.00	3.22	1.81
2"	6.27	3.20	2.19

* - FLG IS DBL DRILLED FOR 1-1/2 & 2" METER INSTALLATION

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\JJ\SUBMITTALS\E4205SG

						DRFTR	RWB	2/8/10	JONES	
						CHKR				
						ENGR				
						MGR				
									UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION
									SURFACE PREPARATION:	
									BREAK CORNER(S) ---- .000	
									SURFACE FINISH -- XX RMS	REF. No.
							BY	DATE	TOLERANCE(S):	
									LINEAR ----- ± .000	
									ANGULAR ----- ± 0°00'	
						STK No:				
						MAT'L:				
						DESCR.				DWG NUMBER
						GROUND KEY LLB ANGLE METER VALVE (110 CTS x MTR FLANGE)				E4205SG
REV	ECR	DESCRIPTION	DATE	BY	CHKR					

DWG NUMBER
E4205SG
JJ-MRKTNG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED