


A453-5 1/4" SENTINEL "250" W/ TWO HOSE NOZZLES & ONE 5" STORZ NOZZLE
AWWA C502 COMPLIANT - 250 P.S.I. W.P. - 500 P.S.I. TEST, UL/FM LISTED

DWG. FH 242

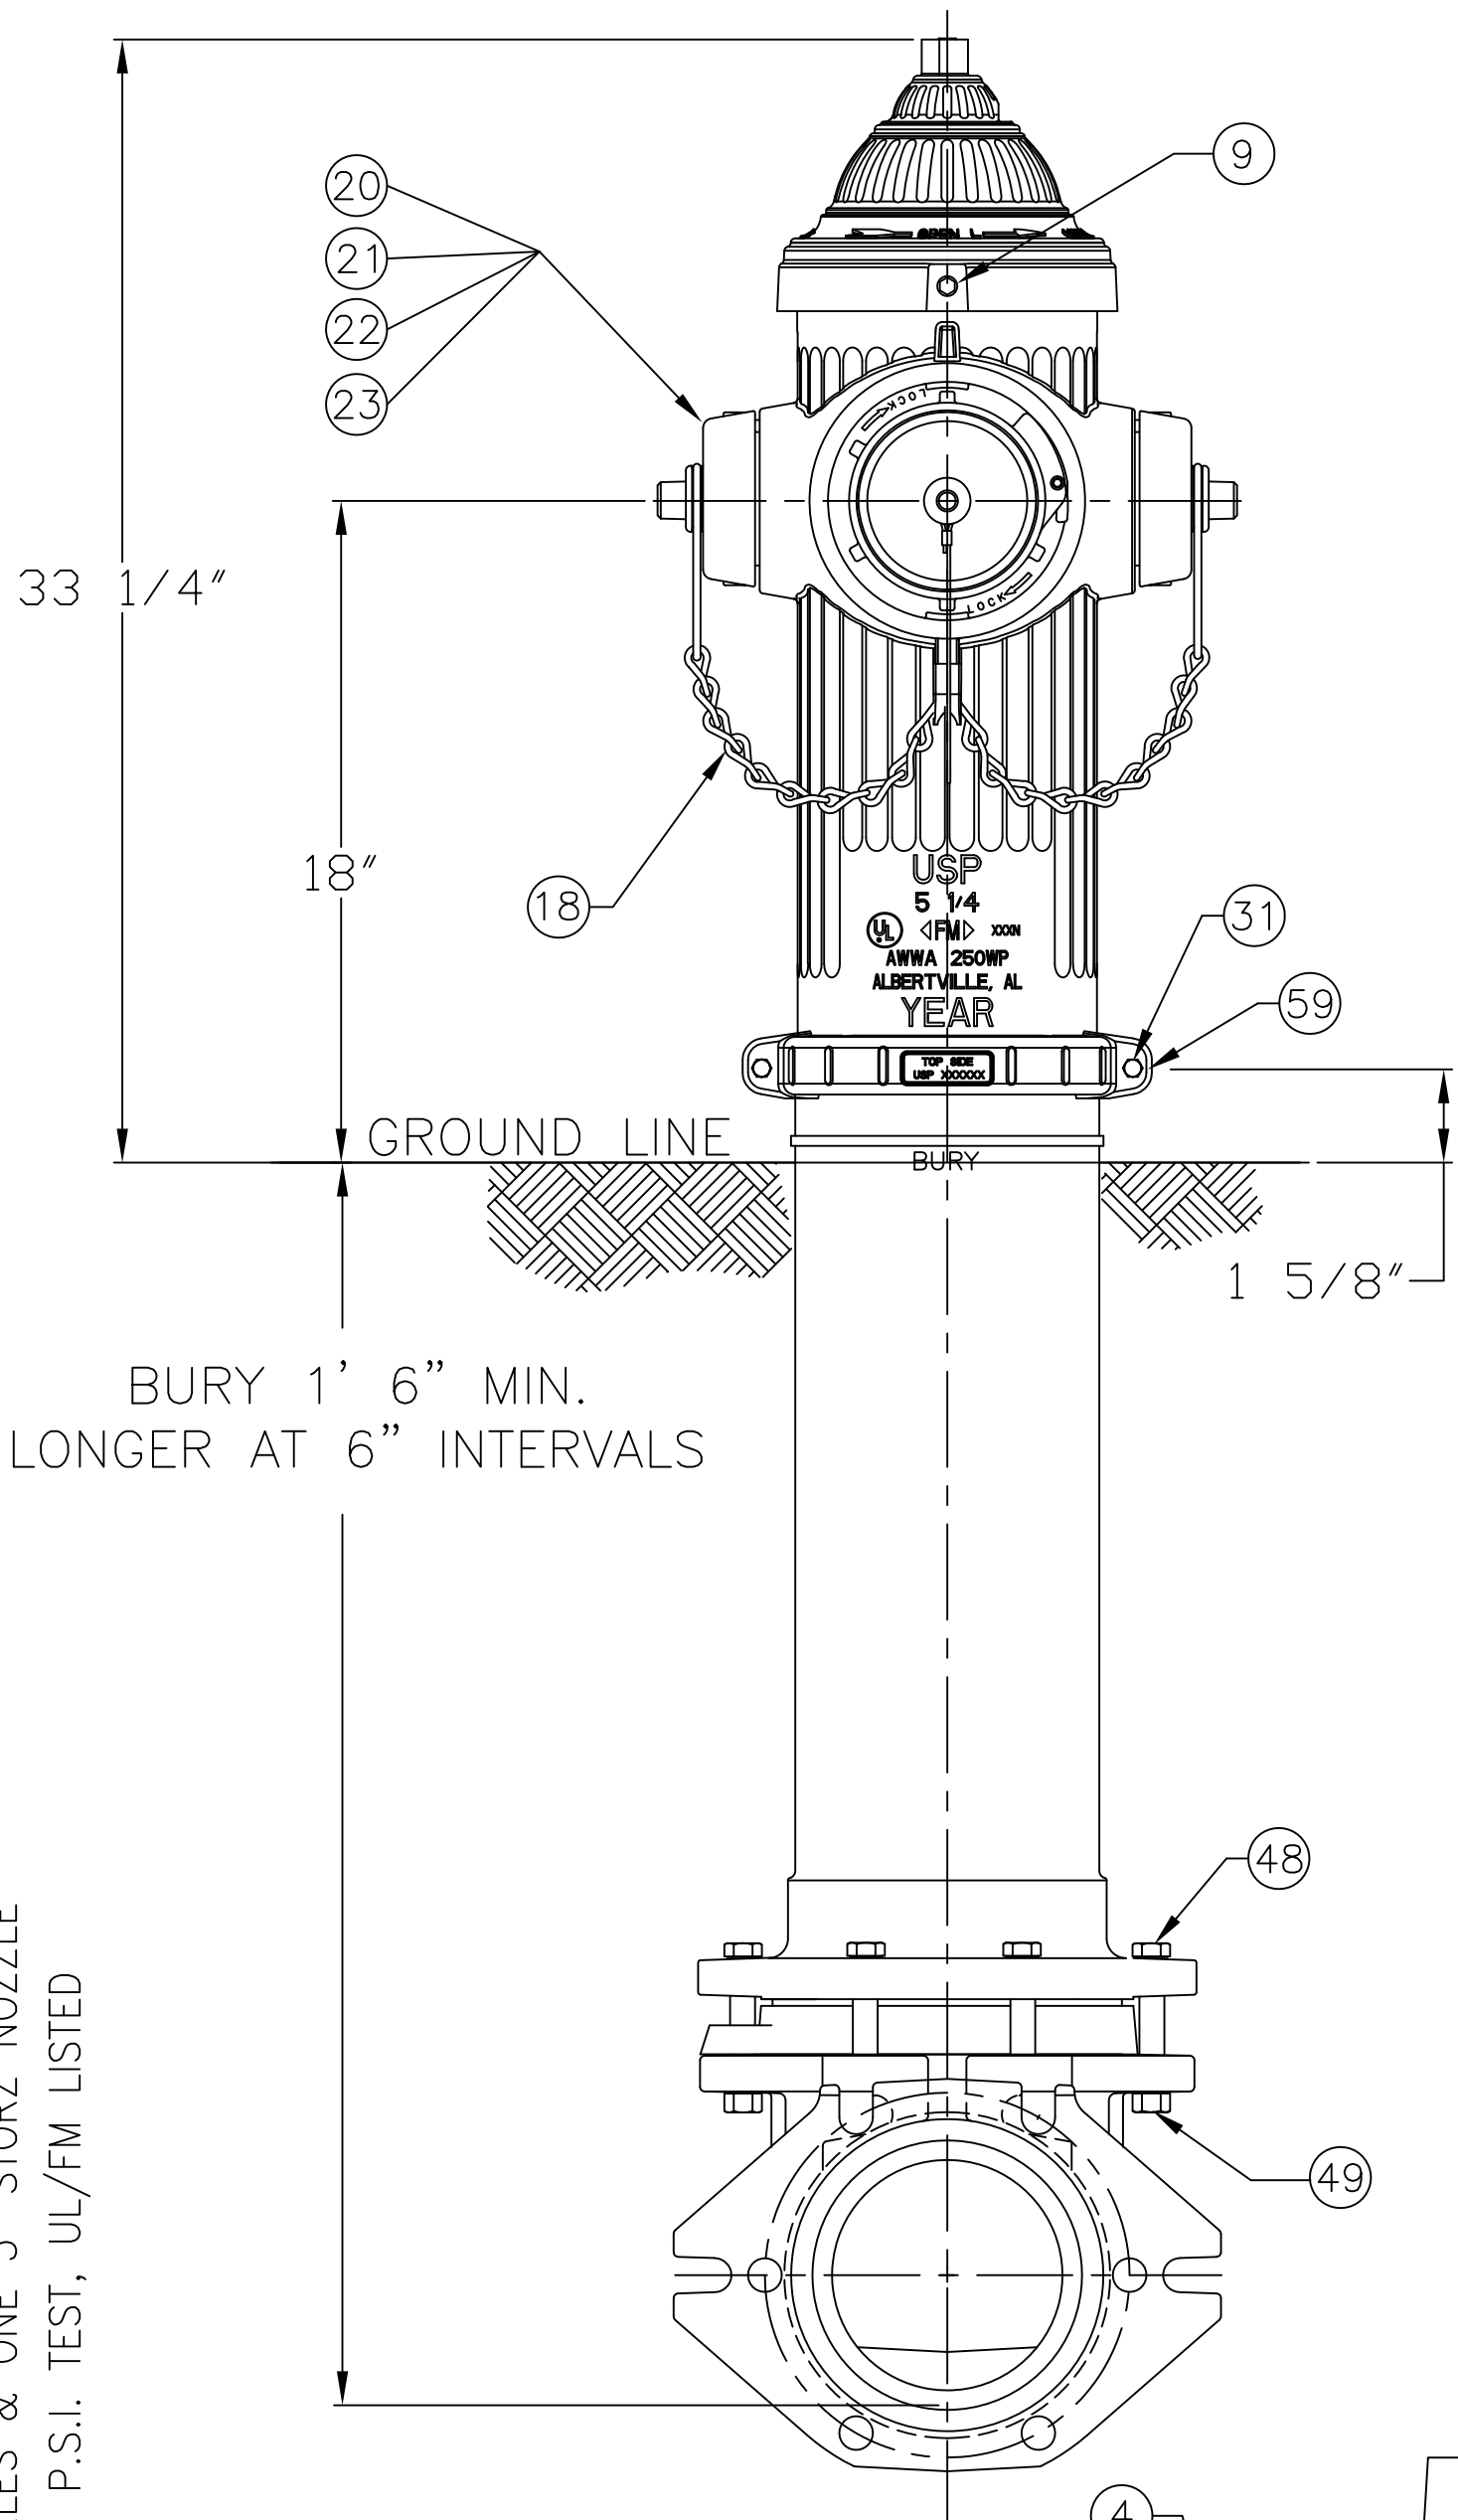

PARTS LIST				
ITEM	DESCRIPTION	REQ'D	MATERIAL	A.S.T.M.
1	OPERATING NUT	1	DUCTILE IRON	A-536
2	OPERATING NUT SEAL	1	RUBBER	BUNA N 70 DURO
3	OPERATING NUT LOCKING PIN	1	STEEL	
4	LUBRICANT (IN CHAMBER)	1	DIANA 2100	FORSYTHE
5	TRAVEL NUT STOP	1	STEEL	A-307 GRADE B
6	HOLD DOWN NUT	1	BRONZE	A-584 C8345
7	HOLD DOWN NUT SCREW	1	STEEL	A-574
8	BONNET	1	DUCTILE IRON	A-536
9	BONNET LOCKING SCREW	1	STAINLESS STEEL	TYPE 18-8
10	BONNET SEAL	1	RUBBER	BUNA N 70 DURO
11	O-RING	1	RUBBER	BUNA N 70 DURO
12	BONNET-REVOLVING NUT "O" RINGS	2	RUBBER	BUNA N 70 DURO
13	REVOLVING NUT	1	BISMUTH BRASS	B-584 C89833
14	INNER REVOLVING NUT "O" RINGS	2	RUBBER	BUNA N 70 DURO
15	GASKET	1	RUBBER	D-2000
16	PUMPER NOZZLE O-RING	1	RUBBER	D-2000 BUNA N
17	5" STORZ PUMPER CAP	1	ALUMINUM	B-108 ALLOY 356-T6
18	CAP CHAINS	2	STEEL	ELECTRO GALV.
19	5" STORZ PUMPER NOZZLE	1	MANG.BRONZE	B-584 C86300
20	HOSE NOZZLE	2	BISMUTH BRASS	B-584 C89833
21	HOSE NOZZLE CAP GASKET	2	RUBBER	D-2000 NEOPRENE


SEE CAT. RECORD FOR RESPECTIVE PARTS OR SUB. ASS'YS

ITEM	DESCRIPTION	REQ'D	MATERIAL	A.S.T.M.	
22	HOSE NOZZLE "O" RING	2	RUBBER	D-2000	BUNA N 70 DURO
23	HOSE NOZZLE CAP	2	CAST IRON	A-126	CLASS B
24	ROD UPPER	1	HOT ROLLED STEEL		
25	STANDPIPE UPPER	1	DUCTILE IRON	A-536	
26	ROD COUPLING (FRANGIBLE)	1	STAINLESS STEEL	A-890	1.5% SILICON MAX.
27	COTTER PIN	2	STAINLESS STEEL	A-276	302
28	CLEVIS PIN	2	STAINLESS STEEL	A-276	305
29	STANDPIPE COUPLING SEAL	1	RUBBER		BUNA N 70 DURO
30	SP.COUPLING HALVES	2	CAST IRON	A-126	CLASS B
31	STANDPIPE COUPLING BOLTS	2	STAINLESS STEEL	A-194	316
32	VALVE ROD LOWER	1	HOT ROLLED STEEL		
33	STANDPIPE LOWER	1	CAST IRON	A-126	CLASS B
34	TOP PLATE PIN-SHEAR PROOF	1	STAINLESS STEEL	A-276	302
35	UPPER VALVE PLATE	1	BISMUTH BRASS	B-584	C89833
36	DRAIN VALVE FACING	2	H.D. POLYETHYLENE		LS 5660-00
37	DRAIN VALVE FACING SCREW	4	STAINLESS STEEL	A-276	302
38	BOTTOM SEAT "O" RING	1	RUBBER	D-2000	BUNA N 70 DURO
39	DRAIN RING	1	BRONZE	B-584	ALLOY 844
40	SEAT RING	1	BISMUTH BRASS	B-584	C89833
41	DRAIN RING HOUSING	1	CAST IRON	A-126	CLASS B
42	DRAIN RING HOUSING O-RING	1	RUBBER	D-2000	BUNA N 70 DURO
43	MAIN VALVE	1	RUBBER	D-2000	NATURAL

ITEM	DESCRIPTION	REQ'D	MATERIAL	A.S.T.M.	
44	LOWER VALVE PLATE	1	CAST IRON	A-126	CLASS B
45	STORZ CAP CABLE	1	STAINLESS STEEL		
46	CHAIN HOOK	1	STEEL		ELECTRO GALV.
47	UPPER STEM PIN	1	STAINLESS STEEL	A-276	302
48	HEX BOLT	6	STEEL	J429	GRADE 2
49	HEX NUT	6	STEEL	A563	GRADE B
50	SHOE	1	DUCTILE IRON	A-536	65-45-12
* 51	PIPE GLAND	1	CAST IRON	A-126	CLASS B
52	TOP SEAT O-RING	1	RUBBER	D-2000	BUNA N 70 DURO
* 53	MECH. JOINT GASKET	1	RUBBER	D-2000	R-42
* 54	T-HEAD BOLT	6	STEEL	A-242	TYPE 1
* 55	HEX NUT	6	STEEL	A-242	TYPE 1
56	ANTI-FRICTION BEARING	1	DELIN 500		DUPONT
57	SLEEVE	1	COPPER	B-75	ALLOY 122
58	STEM O-RING	1	RUBBER	D-2000	BUNA N
59	STANDPIPE COUPLING NUTS	2	STAINLESS STEEL	A-193	316
* 60	NOZZLE LOCKS	2	STAINLESS STEEL	A-276	305 OR 410

* NOT SHOWN

NOTE: SIZE AND STYLE OF OPERATING NUT, SHOE SIZE, AND
THREADING OF NOZZLES IS PER CUSTOMER SPECS.

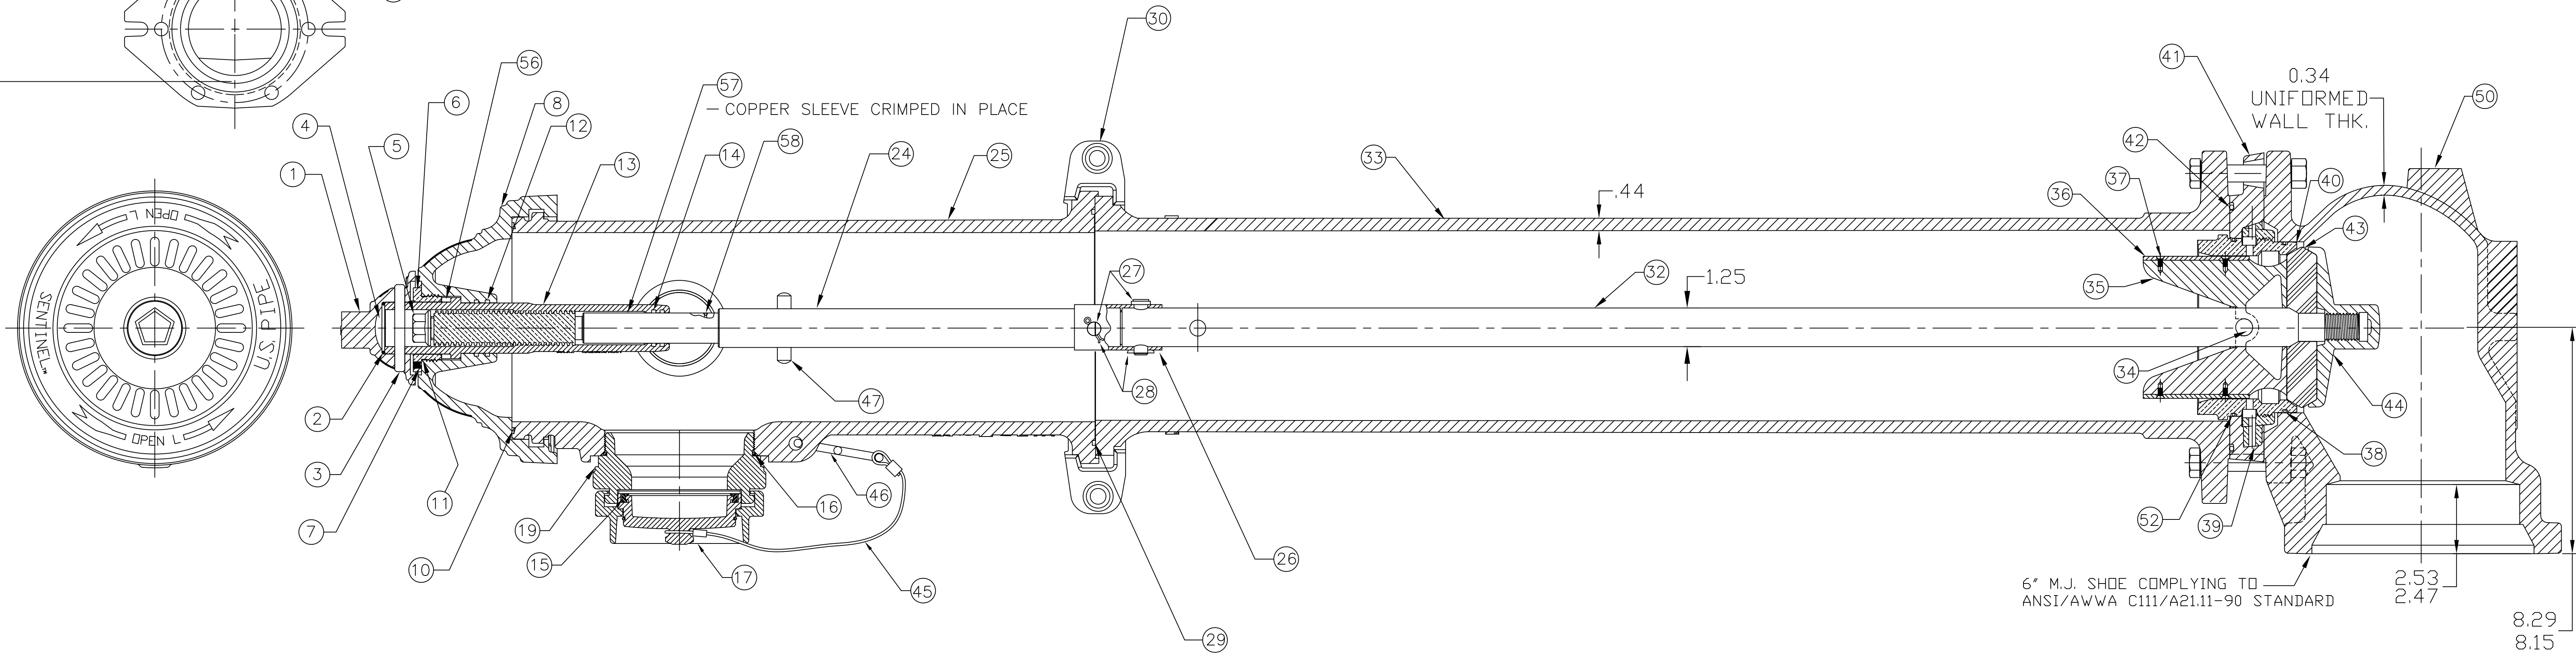

D	REVISE TITLEBLOCK		ANC		6-27-16
C	REVISE MATERIAL ON ITEM #13,20,35,40		ANC		12-11-13
B	REVISE MATERIAL ON ITEM #19		ANC		1-23-13
A	ADD AWWA C502 COMPLIANT, UL/FM LISTED, 250 PSI W.P. & 500 PSI TESTED		ANC		7-10-09
REV.	DESCRIPTION	REF.	DRFT'R	CHK'R	APP

A/C (MILLIMETER) INCH		TOLERANCES - MACHINING UNLESS OTHERWISE NOTED BREAK EDGES MACH. .006/.016		THIRD ANGLE PROJECTION	
INITIAL RELEASE	ANC 07-08-09	FINISH SURFACES 125		PURCH.	FINISH
DRFT'R		FRACTIONS ±1/64		REF. NO.	SCALE
CHK'R		DECIMALS 2 PL ±.025 3 PL ±.005		ANGLES ±1°	N.T.S.
APP		SEE TABLE		STK. NO.	SEE TABLE
E.O. NUMBER		MATERIAL DESCR.		REVISION	NUMBER
		5 1/4" SENTINEL "250" W/ TWO HOSE NOZZLES ONE 5" STORZ NOZZLE		D	FH 242
					SHEET 1 OF 1